


# IJ 3000™

## Integrated Valve large character ink jet printer

The world's smartest ink jet system delivers 24/7 production efficiency.

- *Touch Screen* graphical user interface
- *Around-the-Clock* diagnostics and status
- *Worldwide Networking* with Ethernet connectivity
- *Stores* up to 500 messages in memory
- *Character Sizes* from 3/8" to 2" tall
- *Print Speed* up to 650 fpm

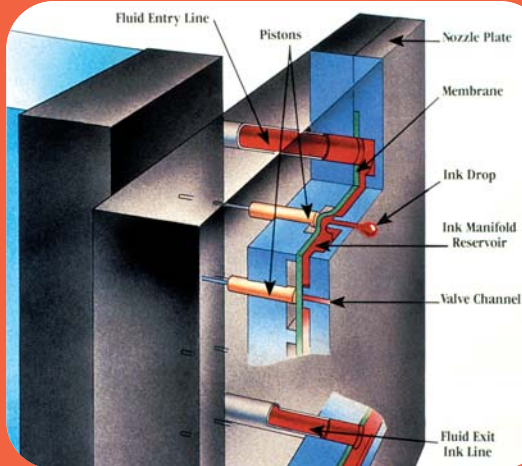

**Patented** Integrated Valve technology precisely controls ink flow and powerful solenoids deliver perfectly formed ink drops, resulting in sharp, clean characters.



**IJ/3000** graphical touch screen allows fast, fingertip control of the system.



**IJ/3000** prints on practically any substrate—corrugate, plastic, glass, metal, carpeting and more.



# Specifications IJ 3000™ Integrated Valve large character ink jet printer

## Printheads

Types:	Porous, Non-Porous, Pigmented, Hermetically sealed	
Print Speed:	Up to 650 fpm	
Print Lines:	1 for 9-dot printhead; 3 for 18-dot printhead	
Orientation:	360 degrees for top, side and bottom coding	
Ink Throw Distance:	Average 1/2"	
Dot Size:	Individual dot size adjustment	
Dimensions:	9-dot printhead	2.25" H x 4.75" W x 8.88" L (57.1 mm x 121 mm x 226 mm)
	18-dot printhead	5.125" H x 3" W x 9.625" L (130 mm x 76.2 mm x 244 mm)



Portable Cart (optional)

## Controller

Enclosures:	Painted steel or stainless steel
User Interface:	Graphical user interface, 70-key QWERTY keyboard, 320 x 240 color LCD touch screen
Communication Ports:	RS-232 (2), Ethernet (1)
Auto Codes:	Time, Sell By, Gregorian Date, Julian Date, Rollover Time, Shift, When Printed, Count
Memory:	3 MB flash type; 500 messages, 150 characters in length
Printheads:	9-dot 1/2," 9-dot 7/8," 18-dot 1," 18-dot 2." Any combination of 9- and 18-dot printheads up to 72 dots per interface board. 1 or 2 interface boards (72 dots per interface boards)
Fonts:	5-dot, 7-dot, 9-dot, 18-dot standard
Logos:	.BMP files
Electrical:	90-260 VAC, 50/60 Hz, 3.0 A max., 15 VDC, 4.0 A per interface card
Product Sensor:	15 VDC, current sinking, active low type (1 per interface board)
Encoder:	1024 ppr/100 ppi, TTL level, 5 VDC (1 per interface board)
Temperature/Humidity:	Operating temperature from 40° F to 104° F; operating humidity 10-90% (non-condensing)
Dimensions/Weight:	7.7" H x 12.8" W x 14.4" D (195 mm x 325 mm x 366 mm); 13.6 lbs. (6.2 kg)
Safety Listings:	UL, CE, CSA

## Ink Delivery System & Inks

Enclosures:	Painted steel or stainless steel
Electrical:	115 VAC, 60 Hz; 230 VAC, 50 Hz
Ink Filtration:	100 micron
Operating Pressure:	Approx. 20 - 25 psi
Cable Ports:	Ethernet, Ink low level, Ink status beacon, power cord
Ink Tubing:	Max. 100 ft. from IDS to printhead (horizontal); max. 20 ft. from bottom of IDS to highest printhead (vertical)
Ink Supply:	Max. 2 ft. from bottom of ink supply to bottom of IDS; max. 8 ft. from bottom of ink supply to bottom of IDS; max. 8 ft. horizontal distance between IDS and ink supply
Dimensions/Weight:	5.7" H x 12" W x 10" D (45 mm x 304.8 mm x 255 mm); 14 lbs. (6.4 kg)
Types of Inks:	Water-based for porous surfaces; solvent-based for non-porous surfaces; pigmented for dark surfaces; water resistant, alcohol resistant and wash-off inks for special applications
Ink Colors/Supplies:	Black, red, blue, green, white, custom; available in 5 or 30 gallon containers

For more information on all Diagraph products, consumables, service, parts and inks, please visit our website:

[www.diagraph.com](http://www.diagraph.com)


**Diagraph**  
 An **TW** Company

1 Missouri Research Park Drive • St. Charles, MO 63304 • Phone: 800-722-1125 • Fax: 636-300-2004  
 Equipment Sales: 800-722-1125 • Service, Parts & Inks: 800-526-2531 • Labeling Consumables: 800-695-0036

© 2003 Diagraph • Printed in U.S.A. • N/A • 4/03 • 2.5M