


## AM - 106 | ATD - 106

### AM - 106

#### **AM-106: non-wire, flat component printing**

- Prints on plastics, electronic connectors, and many industrial components
- Utilizes individual steel type or custom dies and logos for unlimited special applications
  - Prints one-, two-, or three-line legends on a wide range of surfaces
    - Prints horizontally or vertically
- The ideal solution for nylon Panduit or Thomas and Betts style cable printers
  - Lightweight, portable, and inexpensive to operate
- Oversized 4" x 6" base plate easily accommodates odd-shaped plastic connectors, parts and assemblies
  - Print area: sizes up to 1" x 3"
  - Hand operated model available

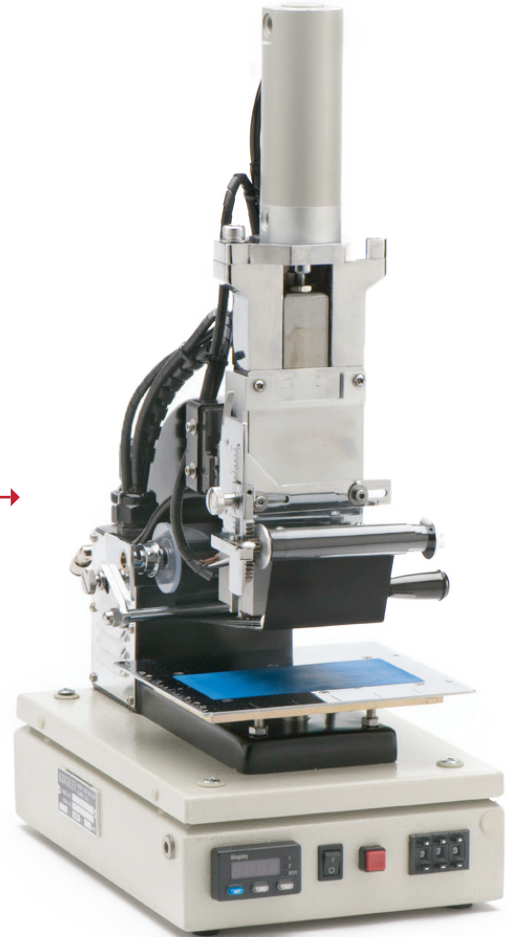

### ATD - 106


#### **ATD-106: off-line wire and sleeve printing**

- For insulated wire and cable, heat-shrink sleeving, rigid or thin-wall flexible tubing and multi-lumen medical tubing
- Utilizes individual steel type
- Prints one-, two-, or three-line legends on sleeving
- Prints horizontally or vertically
- Interchangeable fixture design prints various substrates with precision
- Lightweight, portable, and inexpensive to operate
- Prints on wire sizes from .035" to .750" OD
- Prints on sleeving sizes from .093" to 2.0"
- Hand operated model available



# Kingsley

Providing industrial printing solutions for over 60 years.



**AM - 106**



**ATD - 106**

<b>APPLICATION</b>	Plastic parts, cable ties, tags, ID markers, tapes, labels, heat-shrink sleeving up to 3" ID	Wire—sizes .035" to .750" OD Sleeving—sizes .093" to 2.0" ID
<b>PRINTING METHOD</b>	Hot stamp process; individually set alpha-numeric type and/or unitized engraved	
<b>PRINTING CHARACTERISTICS</b>	One, two or three line, horizontal or vertical printing	Wire: One-line, horizontal or vertical printing along the wire or simultaneous end printing with appropriate wire holding fixtures. Sleeving: one, two or three-line, horizontal or vertical printing.
<b>PRINTING AREA</b>	1" (25mm) x 3" (101mm)	Wire: 1 line x 2" (50.8mm) or 1 line x 2.9" (73.6mm) on sizes .035" (.889mm) to .750" (19mm) (with WFT fixture) OD-Sleeving: 1, 2, or 3 lines x 2.9" (73mm) on sizes .093" (2.3mm) to 2.0" (50.8mm) ID
<b>HOT STAMP FOIL</b>	Kingsley bulk foil in 100' rolls. See Kingsley Foil Data Sheets for complete selection and specifications	
<b>POWER REQUIREMENT</b>	110V standard; 220V available	
<b>AIR REQUIREMENT</b>	100 PSI / 5 CFM	
<b>CONTROLS</b>	On/off switch with power on indicator; adjustable temperature controller with indicator; solid-state dwell timer; air pressure regulator	
<b>MACHINE SUPPLIED WITH</b>	Large 4" x 6" base plate; cycle counter; heavy duty grounded power cord	Heavy duty grounded power cord; safety guard; single-line adapter sleeve
<b>REQUIRED ACCESSORIES</b>	Kingsley type and spacers; one-, two-, or three-line type holders; Kingsley foil See Kingsley Data Sheets for complete selection and specifications	Kingsley type and spacers; wire-holding/sleeve-holding fixtures; Kingsley foil See Kingsley Data Sheets for complete selection and specifications
<b>DIMENSIONS</b>	Height: 16.0" (40.6 cm) Width: 10.5" (26.6 cm) Depth: 18.0" (45.7 cm)	Height: 15.5" (39.3 cm) Width: 11.0" (27.9 cm) Depth: 18.0" (45.7 cm)
<b>WEIGHT</b>	Net: 45 lbs.; Shipping: 50 lbs.	

Optional CE safety guarding available on domestic machines Pricing and specifications are subject to change



Ph. 866.421.9898 | Fx. 618.997.1766  
5307 Meadowland Parkway | Marion, IL 62959 | kingsley@diagraphmsp.com | www.itwnorwood.com