

Operations Manual

Touch Pro 2



404016
Revision A

Touch Pro 2 Operations Manual

**404016
Revision A**

The information contained in this manual is correct and accurate at the time of its publication. The manufacturer reserves the right to change or alter any information or technical specifications at any time and without notice.

©2023 Illinois Tool Works Inc.

All rights reserved

Touch Pro 2

Warranty:

The Touch Pro 2, including all components unless otherwise specified, carries a limited warranty.

For all warranty terms and conditions, contact the manufacturer for a complete copy of the Limited Warranty Statement.

Touch Pro 2

Section 1: Safety2

Section 2: Intended Use3

Section 3: Specifications4

 Technical Specifications4

Section 4: Theory of Operations5

Appendix A: Part Numbers6

 System6

 Replacement Kits6

Section 1: Safety

Following is a list of safety symbols and their meanings, which are found throughout this manual. Pay attention to these symbols where they appear in the manual.



Warning! Denotes possible personal injury and/or damage to the equipment.



Warning! Denotes possible personal injury and/or equipment damage due to electrical hazard.



NOTE: (Will be followed by a brief comment or explanation.)





ESD protection should be worn when servicing internal printed circuit boards.

After service to the equipment is completed, replace all protective devices such as grounding cables and covers before operating the equipment.

WARNINGS

- When servicing the unit's electronic assemblies, always remove the power cord from the unit to prevent accidental shock.
- Wear personal protective equipment, as instructed by your supervisor, when operating or working near this device.

Section 2: Intended Use

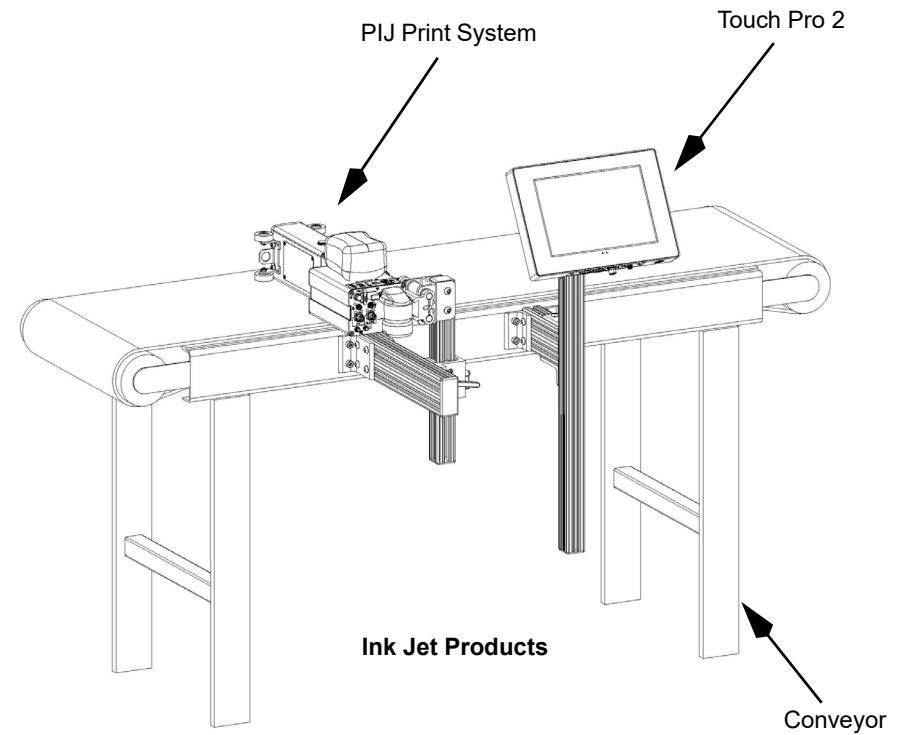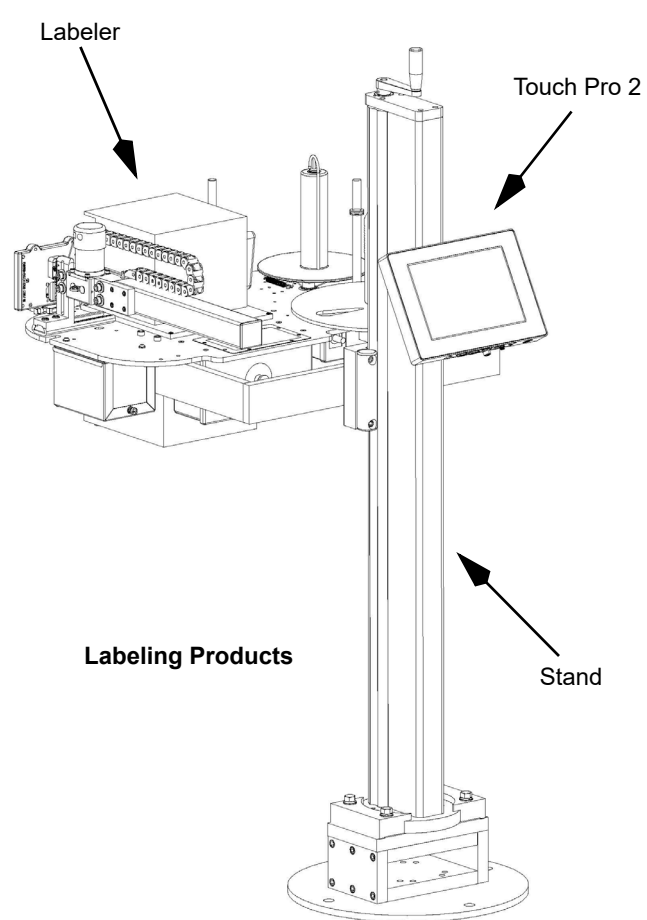

Section 3: Specifications

Technical Specifications

Size

Height: 229mm [9.01in]

Width: 306mm [12.04in]

Depth: 32mm [1.25in]

Weight: 2.27kg [5lbs]

Enclosure

ABS and Stainless Steel

User Interface

Windows 10

Display: 10.5", Touch Screen

Specifications

RAM: 4GB

Hard Drive: 64GB SSD

Ports and Switches

2x USB

1x Ethernet


1x 24 VDC, 5AMP (0.5 AMP min)

Power On/Off Switch

Temp Specs

5°C - 40°C

(41°F - 104°F)

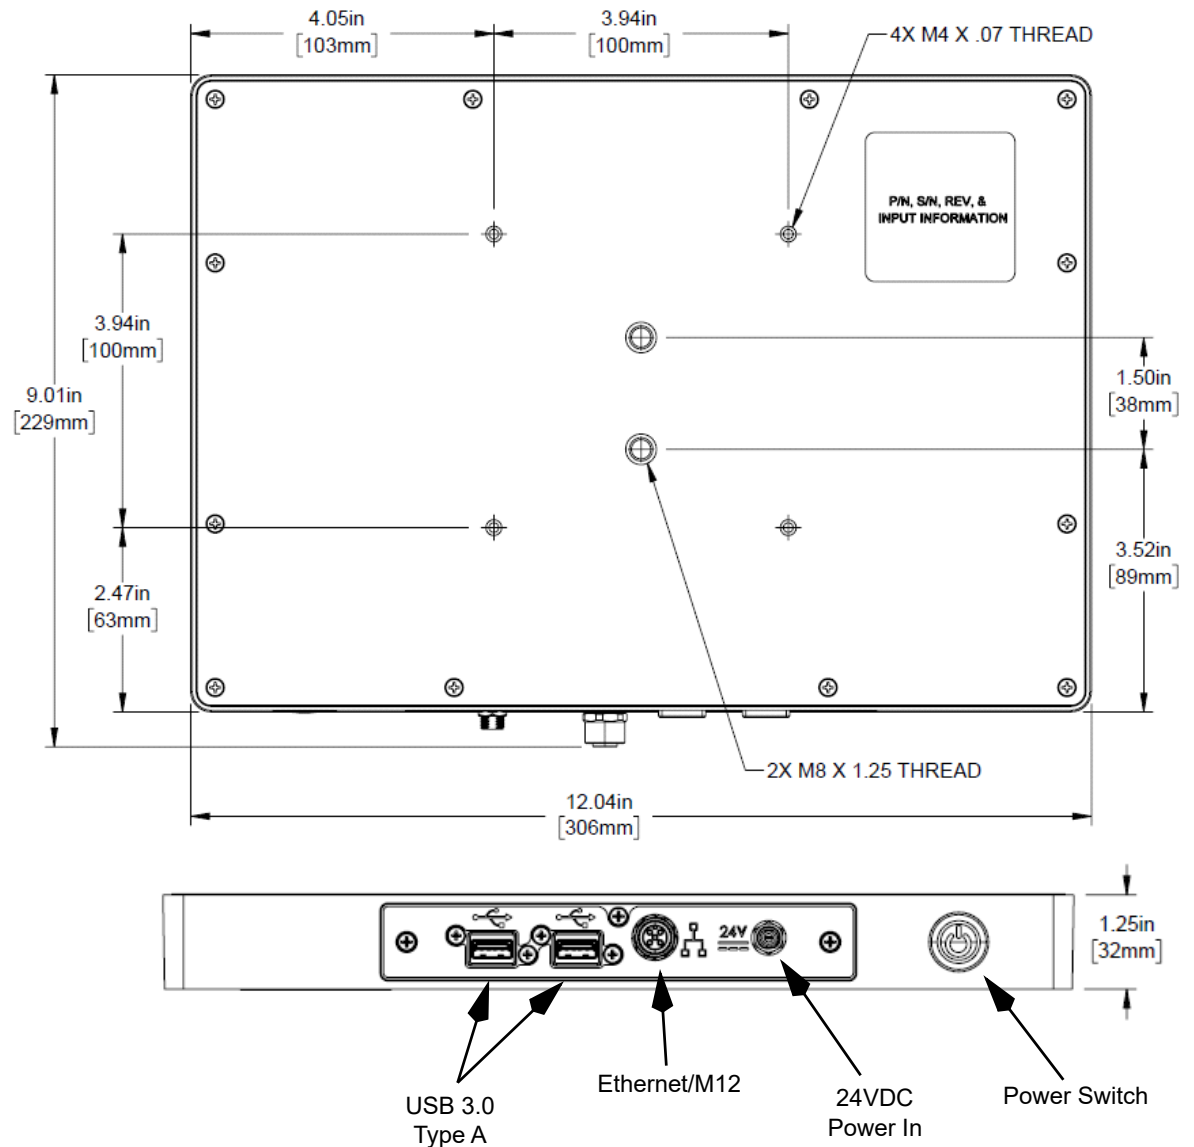

Section 4: Theory of Operations



Note: It is recommended to use the lighted power switch to turn the system on and off.

Appendix A: Part Numbers

System

Item	Kit No.	Description
1	404021	Assembly, Touch Pro 2, PIJ
2	404021ALP	Assembly, Touch Pro 2, PALM



Replacement Kits

Item	Kit No.	Description
1	404253	Kit, PCB, Touch Pro 2
2	404254	Kit, Power Supply
3	404255	Kit, Plugs (USB Plugs, Ethernet Plug and Power Cap)